
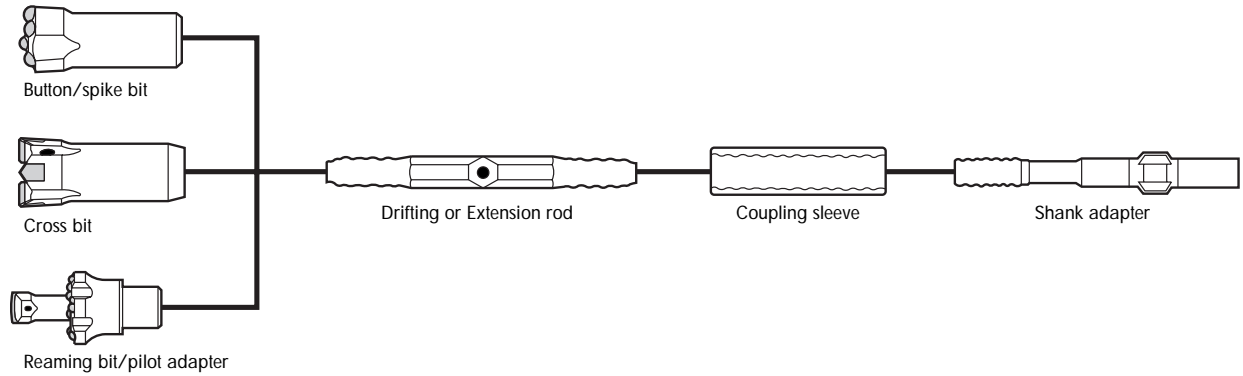





DRIFTING & TUNNELING EQUIPMENT


ROPE THREAD R25 1" SERIES



| BIT | Carbide shape | D | | Part No | Approx. Weight | |
|---|---------------|----|--------|---------|----------------|-----|
| | | mm | in | | Kg | lb |
|  | Round | 35 | 1 3/8" | | 0.5 | 1.0 |
| | Spike | 35 | 1 3/8" | | 0.5 | 1.0 |
| | Round | 38 | 1 1/2" | | 0.5 | 1.1 |
| | Spike | 38 | 1 1/2" | | 0.5 | 1.1 |
| | Round | 41 | 1 5/8" | | 0.6 | 1.3 |
| | Spike | 41 | 1 5/8" | | 0.6 | 1.3 |
| Cross type  | | 35 | 1 3/8" | | 0.4 | 0.9 |
| | | 38 | 1 1/2" | | 0.5 | 1.1 |
| | | 41 | 1 5/8" | | 0.6 | 1.3 |
| | | 45 | 1 3/4" | | 0.7 | 1.6 |
| | | 51 | 2" | | 0.9 | 2.0 |

| DRIFTING ROD | H | | L | | Part No | Approx. Weight | |
|---|----|----|------|--------|---------|----------------|------|
| | mm | in | mm | ft/in | | Kg | lb |
|  | 25 | 1" | 2475 | 8' 2" | | 10.2 | 22.7 |
| | | | 3090 | 10' 2" | | 12.7 | 28.2 |

| COUPLING SLEEVE | D | | L | | Part No | Approx. Weight | |
|---|----|--------|-----|--------|---------|----------------|-----|
| | mm | in | mm | in | | Kg | lb |
|  | 41 | 1 5/8" | 160 | 6 1/4" | | 0.9 | 2.0 |
| | 45 | 1 3/4" | 160 | 6 1/4" | | 1.1 | 2.4 |

| ADAPTER COUPLING | D | | L | | Part No | Approx. Weight | |
|---|----|----------|-----|----------|---------|----------------|-----|
| | mm | in | mm | in | | Kg | lb |
|  | 40 | 1 37/64" | 173 | 6 13/16" | | 0.9 | 2.0 |
| | 45 | 1 3/4" | 170 | 6 57/64" | | 0.9 | 2.0 |

AUSTRALASIAN MINING SERVICES PTY LTD

